

FIBER OPTIC INLINE CLOSURE

DESCRIPTION


The closure is made of high strength engineering ABS, effectively prevent it from aging caused by coldness, heat, oxygen and ultraviolet radiation. It has a compact design and sealed by silicon gasket for long term reliability.

FEATURES


- Advanced internal structure design,
- Fire resistant, waterproof and quakeproof
- 3 entries & 3 exits for cables

APPLICATIONS

- Underground /man hole cable jointing
- Aerial cable jointing

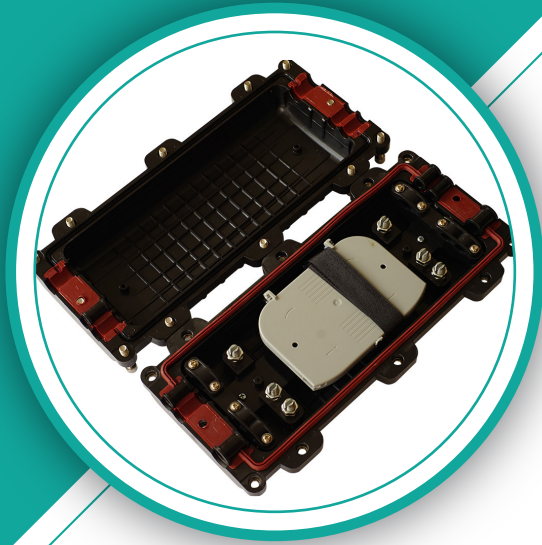

FIBER OPTIC INLINE CLOSURE

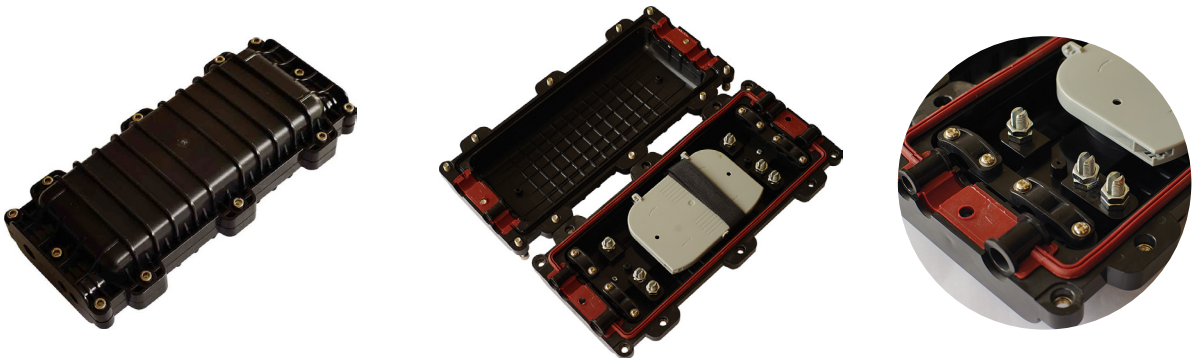

SPEC	DESCRIPTION
Material	High Strength Engineering ABS
Operating Temperature	-40°C ~ +65°C
Storage Temperature	-25°C ~ +65°C
Air Pressure	70kpa ~ 106kpa
Protection Standard	IP68
Sealing Performance	≥150kpa/72h
Dimension (L X W X H)	366 X 176 X 105 mm
Fiber Core Capacity	48 core